




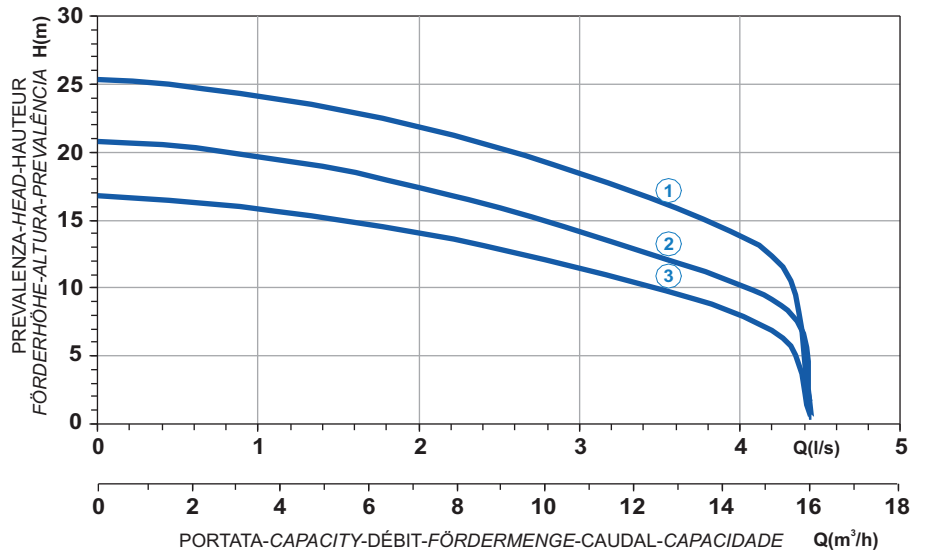

	Ghisa EN-GJL-250		Cast Iron EN-GJL-250
	Fonte EN-GJL-250		Grauguss EN-GJL-250
	Hierro fundido EN-GJL-250		Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica



Power supply	1ph 230V 50Hz
R.P.M.	2850
Free passage (mm)	6
Discharge (mm)	DN 40
Weight (Kg)	40

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7003026	G271M6T1-J6AD1	1,8	10	35	-
2	7003028	G271M6T2-J6AD1	1,1	7,5	21	-
3	7003031	G271M6T3-J6AD1	1,1	7,5	21	-

Pompa fornita di quadro con condensatore di spunto e disgiuntore. - Pump supplied with a Control Panel with capacitor and disjunctour.
Pompe fournie avec un panneau de commande avec le condensateur et le disjoncteur. - Pumpe inklusive Schaltgerät mit Kondensator und Schalter.
Bomba provista de un panel de control con el condensador y el disjunctour. Bomba fornecida de quadro com condensador e disjuntor.

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

