




- Ghisa EN-GJL-250
- Fonte EN-GJL-250
- Hierro fundido EN-GJL-250
- Cast Iron EN-GJL-250
- Grauguss EN-GJL-250
- Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique  
Kennlinie - Curva característica - Curva característica

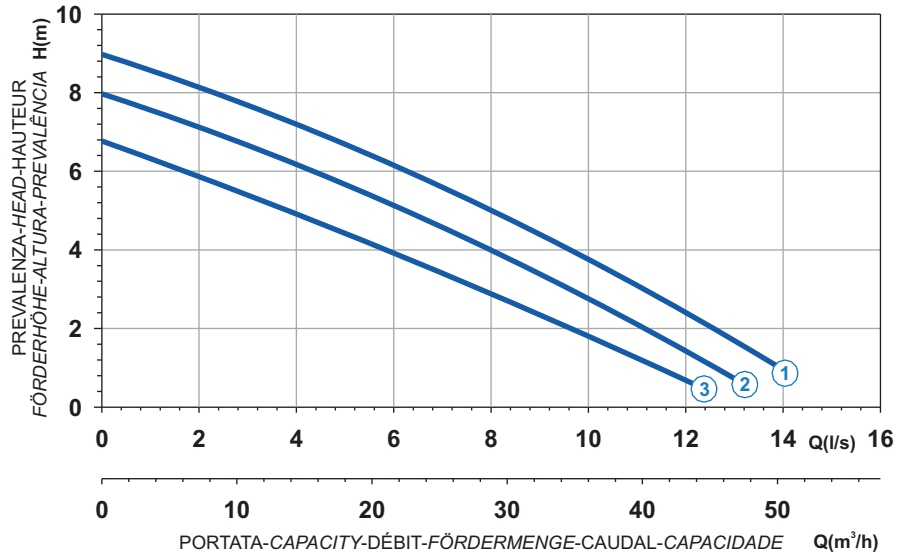

Power supply	1ph 230V 50Hz
R.P.M.	1450
Free passage (mm)	50
Discharge (mm)	DN 65
Weight (Kg)	42

Curve N°	Code	Type	MOTOR			ATEX code
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7002285	G471M6V1-L50AB1	1,2	8,5	34,8	7002822
2	7002286	G471M6V2-L50AB1	1,0	7,0	28,7	7002823
3	7002287	G471M6V3-L50AB1	1,0	7,0	28,7	7002824

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

